

PD10 CONVERTER OF USB/RS-485 INTERFACES

FEATURES:





- Enables the connection of the industrial RS-485 interface to the PC computer through the USB port
- Maximum transmission rate up to 1 Mb/s (this rate depends on RS-485 wire length)
- Transparent for communication protocols
- Galvanic separation protects computer USB ports.

EXAMPLE OF APPLICATION

INPUTS:



OUTPUTS:



GALVANIC ISOLATION:





DIGITAL INTERFACE			
Interface type	Properties		
RS-485/USB	Baud rate:	up to 1 Mb/s	
	Steering of the data flow direction:	automatically	
	Controllers:	Windows 2000, XP, Server 2003,	
		Vista, Server 2008 (x86 and x64)	


Export department: +48 68 45 75 130 e-mail: export@lumel.com.pl

LUMEL S.A.
ul. Słubicka 4
65-127 Zielona Góra
POLAND
WWW.LUMEL.COM.PL


EXTERNAL FEATURES		
Overall dimensions	52 x 44 x 24 mm	
Weight	0.1 kg	with packing
Protection grade	Housing: IP40	from terminal side: IP20
Housing	Portable	



PD10 CONVERTER OF USB/RS-485 INTERFACES

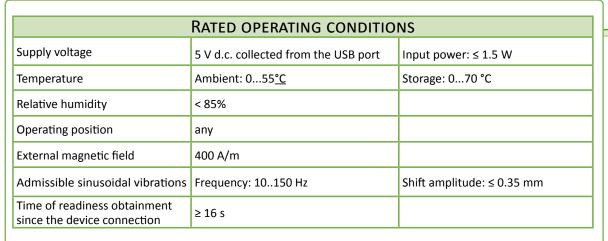

SAFETY AND COMPATIBILITY REQUIREMENTS			
Electromagnetic compatibility	Noise immunity	acc. to EN 61000-6-2	
	Fastness against supply decays	acc. to EN 61000-6-2	
	Emission of radio electric perturbations	acc. to EN 61000-6-4	
Pollution level	2		
Installation category	III	acc. to EN 61010-6-1	
Maximum phase-to-earth operating voltage	50 V	acc. to EN 01010 0 1	

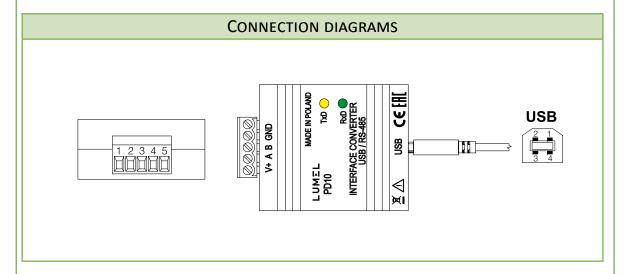

ORDERING CODE

Code	Description
PD10 00M0	Interface converter USB/ RS-485; documentation and descriptions in Polish and English version, test certificate

For more information about LUMEL's products please visit our website: www.lumel.com.pl

Export department: +48 68 45 75 130 e-mail: export@lumel.com.pl

LUMEL S.A. ul. Słubicka 4 65-127 Zielona Góra POLAND WWW.LUMEL.COM.PL