# LPCD03

COMMUNICATION INTERFACE Ø22MM PLATINUM SERIES CHROMED PLASTIC, USB INTERFACE TYPE 3.0, A/B CONNECTION TYPE

| | | | |
|---|---|---|---|
| Product designation | | | USB interface, A/B female type connection |
| Product type designation | | | LPCD0 |
| **General characteristics** | | | |
| Material | | | Polyamide |
| IEC degree of protection | | | IP65 on front and IP20 on rear |
| **Electrical characteristics** | | | |
| Rated insulation voltage Ui IEC/EN | | V | 5VAC/DC |
| Contact resistance | | mΩ | ≤30 |
| **Mechanical features** | | | |
| Weight | | g | 18 |
| **UL technical data** | | | |
| UL degree of protection | | | 1, 2, 3R, 4, 4X, 12, 12K on front |
| **Ambient conditions** | | | |
| Temperature | | | |
| | Operating temperature | | |
| | min | °C | -25 |
| | max | °C | +70 |
| | Storage temperature | | |
| | min | °C | -40 |
| | max | °C | +85 |

## Dimensions

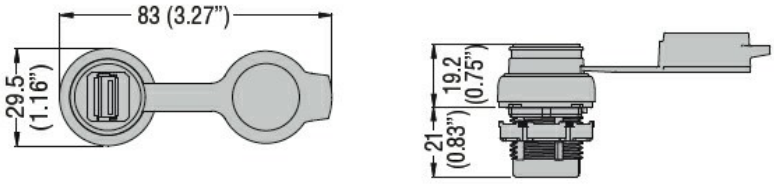


## Certifications and compliance

| | |
|---|---|
| Compliance | |
| | CSA C22.2 n° 14 |
| | IEC/EN/BS 60947-1 |
| | IEC/EN/BS 60947-5-1 |
| | UL508 |
| Certificates | |
| | cULus |
| | EAC |

## ETIM classification

| | |
|---|---|
| ETIM 8.0 | EC000797 - USB-Hub |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding