

PROeco PRO ECO 120W 24V 5A

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com



You are looking for a reliable power supply with basic functions.

With PROeco we can offer you low-cost switch-mode power supply units with high efficiency and system capability. Let's connect.

In the series production of machines, in particular, switch-mode power supply units with above-average performance values can deliver genuine competitive advantages.

The low-cost PROeco series offers all the basic functions and delivers impressively high performance and flexibility.

Our PROeco switch-mode power supply units feature a compact design, high efficiency and are extremely easy to maintain. Thanks to temperature protection, short-circuit and overload resistance they can be universally used in all applications.

Wide-ranging safety functions and compatibility with our diode and capacitance modules, together with UPS components for setting up a redundant power supply, characterise solutions with PROeco.

General ordering data

Type	PRO ECO 120W 24V 5A
Order No.	1469480000
Version	Power supply, switch-mode power supply unit, 24 V
GTIN (EAN)	4050118275476
Qty.	1 pc(s).

PROeco
PRO ECO 120W 24V 5A
Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmüller.com

Technical data
Dimensions and weights

Width	40 mm	Height	125 mm
Depth	100 mm	Weight	680 g
Net weight	680 g		

Temperatures

Operating temperature	-25 °C...70 °C	Storage temperature	-40 °C...85 °C
-----------------------	----------------	---------------------	----------------

Input

AC current consumption	1,26 A @ 230 V AC / 2,24 A @ 110 V AC	AC input voltage range	85...264 V AC (Derating @ 100 V AC)
Connection system [Input]	Screw connection	DC current consumption	0,39 A @ 370 V DC / 1,16 A @ 120 V DC
DC input voltage range	80...370 V DC (Derating @ 120 V DC)	Frequency range AC	47...63 Hz
Input frequency	47...63 Hz	Input fuse (internal)	Yes
Inrush current	max. 40 A	Rated input voltage	100...240 V AC (wide-range input)
Recommended back-up fuse	4 A / DI, safety fuse 6 A, Char. B, circuit breaker 3...5 A, Char. C, circuit breaker		

output

Capacitive load	unrestricted	Connection system [Output]	Screw connection
Continuous output current @ U_{Rated}	5 A @ 55 °C, 3,75 A @ 70 °C	Output power	120 W
Output voltage	24 V	Output voltage	22...28 V (adjustable via potentiometer)
Overload protection	Yes	Parallel connection option	yes, max. 5
Protection against inverse voltage	Yes	Ramp-up time	≤ 100 ms
Rated (nominal) output current @ U_{Nom}	5 A at 55 °C	Rated output voltage	24 V DC ± 1 %
Residual ripple, breaking spikes	< 50 mV _{SS} @ 24 V DC, I_N		

General data

AC failure bridging time @ I_{Nom}	> 80 ms @ 230 V AC / > 20 ms @ 115 V AC	Degree of efficiency	87 %
Earth leakage current, max.	1 mA	Housing version	Metal, corrosion resistant
Indication	LED green ($U_{output} > 21,6$ V DC), LED yellow ($I_{output} > 90\% I_{Rated}$ typ.), LED red (overload, overtemperature, short-circuit, $U_{output} < 20,4$ V DC)	MTBF	> 500,000 h acc. to IEC 1709 (SN29500)
Max. perm. air humidity (operational)	5 %...95 % RH	Mounting position, installation notice	horizontally, on terminal rail TS 35
Operating temperature	-25 °C...70 °C	Power factor (approx.)	> 0,5 @ 230 V AC / > 0,53 @ 115 V AC
Power loss, idling	4 W	Power loss, nominal load	15 W
Protection against over-heating	Yes	Short-circuit protection	Yes
Weight	680 g		

PROeco
PRO ECO 120W 24V 5A

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmüller.com

Technical data
EMC / shock / vibration

Limiting of mains voltage harmonic currents	in accordance with EN 61000-3-2	Noise emission acc. to EN55022	Class B
Vibration resistance IEC 60068-2-6		Interference immunity test acc. to	EN 61000-4-2 (ESD), EN 61000-4-3 (RS), EN 61000-4-4 (burst), EN 61000-4-5 (surge), EN 61000-4-6 (conducted), EN61000-4-8 (Fields), EN61000-4-11 (Dips)
	1 g according to EN50178		
Shock resistance IEC 60068-2-27	15 g In all directions		

Insulation coordination

Class of protection	I, with PE connection	Insulation voltage input / earth	2 kV
Insulation voltage output / earth	0,5 kV	Insulation voltage, input/output	3 kV
Pollution severity	2		

Electrical safety (applied standards)

Electrical machine equipment	Acc. to EN60204	For use with electronic equipment	Acc. to EN50178 / VDE0160
Protection against dangerous shock currents	Acc. to VDE0106-101	Protective separation / protection against electrical shock	VDE0100-410 / acc. to DIN57100-410
Safety extra-low voltage	SELV acc. to EN60950, PELV acc. to EN60204	Safety transformers for switch-mode power supplies	IEC61558-2-16

Connection data (input)

Conductor cross-section, AWG/kcmil, max.	12	Conductor cross-section, AWG/kcmil, min.	26
Conductor cross-section, flexible, min.	0,5 mm ²	Conductor cross-section, rigid, max.	6 mm ²
Conductor cross-section, rigid, min.	0,5 mm ²	Connection system [Input]	Screw connection
Number of terminals [Input]	3 for L/N/PE	Tightening torque, max.	0,6 Nm
Tightening torque, min.	0,5 Nm	Wire connection cross section, flexible (input), max.	2,5 mm ²

Connection data (output)

Conductor cross-section, AWG/kcmil, max.	12	Conductor cross-section, AWG/kcmil, min.	26
Conductor cross-section, flexible, max.	2,5 mm ²	Conductor cross-section, flexible, min.	0,5 mm ²
Conductor cross-section, rigid, max.	6 mm ²	Conductor cross-section, rigid, min.	0,5 mm ²
Connection system [Output]	Screw connection	Number of terminals [Output]	6 (++, -, 13, 14)
Tightening torque, max.	0,6 Nm	Tightening torque, min.	0,5 Nm

Signalling

Contact load (NO contact)	max. 30 V DC / 1 A	Floating contact	Yes
Relay on/off	Output voltage >21,6 V DC / <20,4 V DC, Overload		

Data sheet

**PROeco
PRO ECO 120W 24V 5A**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data

Approvals

Institute (cULus)



Certificate no. (cULus)

E258476

Classifications

ETIM 5.0	EC002541	ETIM 6.0	EC002541
eClass 6.2	27-04-90-04	eClass 7.1	27-04-90-04
eClass 8.1	27-04-90-04	eClass 9.0	27-04-07-03

Product information

Descriptive text ordering data The internal varistor found in a switch-mode power supply does not replace the need for surge protection within a system.

Approvals

Approvals



ROHS

Conform

Downloads

Package insert	Operating instructions
Declaration of Conformity	K562_01_14.pdf
	3-D model


Data sheet

PROeco
PRO ECO 120W 24V 5A

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmüller.com

Drawings

Electric symbol

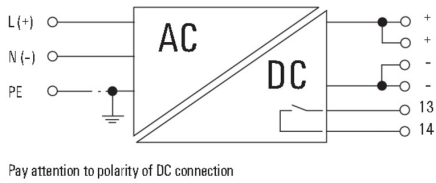

Derating curve

