



Dławice PG - szare


materiał: poliamid 6 + PVC

kolor: szary RAL7035

stopień szczelności: IP68

temp. pracy: -40°C do +80°C

tolerancja: ±5%

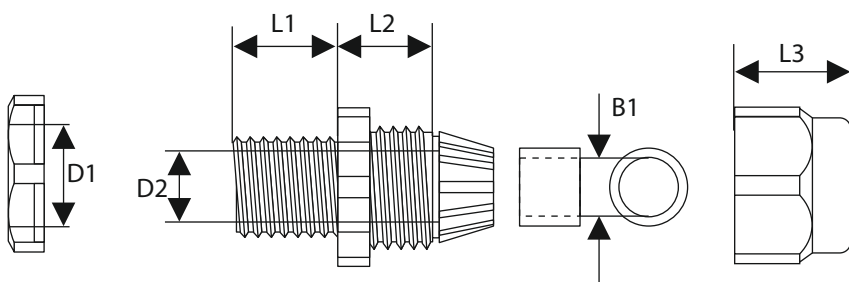

TYP	WYMIARY [mm]						ZAKRES DŁAWIENIA PRZEWODÓW [mm]	OPAKOWANIE [szt]	
	D1	D2	B1	L1	L2	L3			
PG-7	12,1	8,0	6,0	8,0	12,8	13,4	3,5 - 6	50	<input type="checkbox"/>
PG-9	14,3	9,9	7,0	8,0	13,9	15,2	4 - 8	50	<input type="checkbox"/>
PG-11	18,2	13,2	9,6	8,0	15,4	18,3	5 - 10	50	<input type="checkbox"/>
PG-13,5	19,9	15,2	11,7	9,0	15,8	18,9	6 - 12	50	<input type="checkbox"/>
PG-16	22,1	17,2	12,9	10	17,3	19,7	10 - 14	50	<input type="checkbox"/>
PG-21	27,5	22,4	16,5	11	18,6	23,9	13 - 18	50	<input type="checkbox"/>
PG-29	36,2	30,6	23,3	11	20,5	27,4	18 - 25	25	<input type="checkbox"/>
PG-36	46,7	35,2	33,3	15	14,4	30,5	22 - 32	10	<input type="checkbox"/>
PG-42	52,2	39,3	39,6	15	25,4	31,6	30 - 38	10	<input type="checkbox"/>
PG-48	57,6	45,4	45,1	15	25,2	31,3	34 - 44	10	<input type="checkbox"/>

CE **RoHS** **IP68**
Compliant




Dławice PG - czarne

materiał: poliamid 6.6 + PVC

stopień szczelności: IP68

temp. pracy: -40°C do +80°C

tolerancja: ±5%

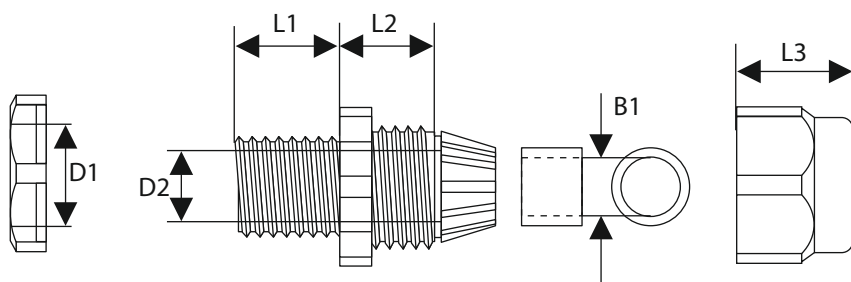

TYP	WYMIARY [mm]						ZAKRES DŁAWIENIA PRZEWODÓW [mm]	OPAKOWANIE [szt]	
	D1	D2	B1	L1	L2	L3			
PG-7B	12,1	8,0	6,0	8,0	12,8	13,4	3,5 - 6	50	■
PG-9B	14,3	9,9	7,0	8,0	13,9	15,2	4 - 8	50	■
PG-11B	18,2	13,2	9,6	8,0	15,4	18,3	5 - 10	50	■
PG-13,5B	19,9	15,2	11,7	9,0	15,8	18,9	6 - 12	50	■
PG-16B	22,1	17,2	12,9	10	17,3	19,7	10 - 14	50	■

RoHS IP68
Compliant